


GREEN AND COMFORTABLE
NATURAL TEXTURE

2019
VTG *CLICK LOCK*

Flooring Installation Process

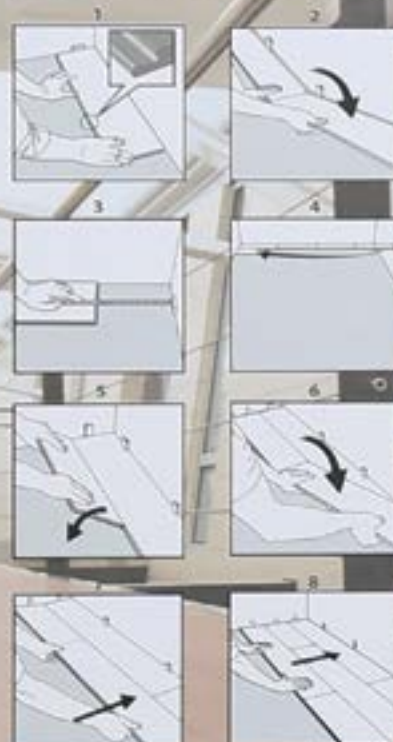

2019

Natural Feeling
Safety
and Environmental-friendly

Click!
Ease of installation

| SPC4.0T

LOCK FLOOR



Waterproof And Anti-slip & Fire

It's emulaion wood surface won't be slippery because product has a high-density structure, keeping the elderly people and young children safe.

The stone and ceramic tile can not compare with it
Through the fire test, it will automatic burn out when its away fire, guarantee the safety of your life



Safety And Environmental-friendly

The materials of the product are safe and environmental-friendly.

No harm to environment and human body
No radioactive elements and formaldehyde.

Abrasion Resistance

The abrasion resistance of the floor depends on the thickness of wear layer and total thickness the surface of SPC floor is covered with 0.3/0.5mm special polymer materials(wear layer)which have strong abrasion resistance.

The life span of SPC Floor for residential use can reach 25years while 5years for commercial use.

Easy Installation

The height of the ground difference can be $\pm 2\text{mm}$ which solve the shrinkage and expand of traditional floor when the ground is flat.

SPC floor can be installed directly without underlayment or other materials.

Lock series is used for office, school,hospital,department store, residential, commercial and industrail area. it is suitable for any place looking for attractive expression and easy installation.

Quietness

After installation, feels more comfortable and more quiet



Natural Feeling
Safety
and Environmental-friendly



2019 | LUXURY VINYL SPC FLOORING



Locking System Product Features

Breaking through of the traditional installation limitation of PVC flooring, combined with the world's best click technology to make it easier and ensure that it is closely connected to each piece. through the set of groove and the tongue and inlaid groove and tongue which can make their force in the opposite direction and restrict each other. It's enough to withstand 500KGS transverse tension to solve the technical problem of seal.

The Locking System floor can be east and fast, low cost to transform the ground, solve the problem of old and old and old floor renovation in all directions, and make living space more aesthetic and comfortable.





SPC4.0T
LOCK FLOOR

2019



Kmflor-303



Kmflor-304



Kmflor-305



Kmflor-306



Kmflor-309



Kmflor-310



Kmflor-311



Kmflor-312

Size:6"x36"/6"x48"/7.325"x48"/9"x48"
 Thick:4.0mm/4.5mm/5.0mm
 Wearlayer:0.3mm/0.5mm



Kmflor-307



Kmflor-308

Size:6"x36"/6"x48"/7.25"x48"/9"x48"
 Thick:4.0mm/4.5mm/5.0mm
 Wearlayer:0.3mm/0.5mm



Kmflor-301



Kmflor-302



COLOR 12



SPC4.0T

TECHNICAL DATA

Description	Test Standard	Result
Dimensional Stability	EN 434	≤0.15%
Peeling Strength	EN431	≥70N
Fire Resistance	EN13501-1	Bf1-S1
Abrasion Resistance	EN 660.2	≤2.0MM3
Slip Resistance	EN 13893	Class DS
Residual Indentation	EN 433	≤0.10mm
Color Fastness	EN 20105-B02	≥Class-6
Chemical Resistance	EN 423	GOOD
Formaldehyde Emission	EN717-1	E1
Flexibility	EN 435	EXCELLENT
Toxic Element Test	GB 18586-2001	GOOD
Surface Treatment		UV Coating
Warranty	Commercial Residential	10years 30years



VIATIC CO., LTD

TAX ID. 0-1055-45118-26-7

300 Soi Ladprao 130 (Mahadthai 2). Ladprao Rd.
Klongchan, Bangkok 10240

tel : 0-2377-4184, 0-2377-4817

Fax : 0-2377-4817 Ext. 13

E-mail : vat@viatic-th.com www.viatic-th.com

LUXURY VINYL SPC FLOORING